FOUND 5/8" REBAR WITH ALUMINUM CAP REESTABLISHED POSITION OF QUARTER CORNER FROM FOUND BEARING TREES—SET 5/8"X24" REBAR WITH 2½" DIA DUCHESNE COUNTY ALUM CAP FOR CORNER AND BEARING TREES AT SECTION CORNER SEC 34 SEC 35 S 89°56'28" W 2626.55' SEC 33 SEC 34 N 89°41'09" E 2641.22' SEC 3 SEC 2 N 89°56'28" E 1313.28' N 89°56'28" E 1313.28' SEC 4 SEC 3 REESTABLISHED POSITION OF SECTION CORNER FROM FOUND BEARING TREES—SET 5/8"X24" N% OF N% OF NE% OF NE% REBAR WITH 2½" DIA. DUCHESNE COUNTY ALUM CAP FOR CORNER N 89°54'05" E 1313.88' N 89°51'42" E 1314.48' 1315.68 1315.68 N 89°46'57" E 2631.35' REESTABLISHED POSITION OF QUARTER CORNER BY SINGLE PROPORTION MEASURE BETWEEN FOUND ORIGINAL MARKED STONE AT QUARTER CORNER-SET 5/8"X24" REBAR WITH DUCHESNE COUNTY SECTION CORNERS—SET 5/8"X24"
REBAR WITH 2½" DIA. DUCHESNE
COUNTY ALUM CAP FOR CORNER ALUMINUM CAP AT CORNER WITH 5278.14 N 89°37'27" E STONE RESET ALONGSIDE 1318.09 1318.09' N 89°37'27" E 2636.18' N 89°37'27" E 2641.96' REESTABLISHED POSITION OF WITNESS CORNER AT SINGLE REESTABLISHED POSITION OF SECTION CORNER FROM FOUND BEARING TREES—SET 5/8"X24" REBAR WITH 2½" DIA. DUCHESNE COUNTY ALUM CAP FOR CORNER PROPORTION MEASURE BETWEEN MARKED STONE AT SECTION CORNER REESTABLISHED POSITION OF QUARTER CORNER BY SINGLE SECTION CORNERS-SET 5/8"X24" REBAR WITH 21/2" DIA. DUCHESNE PROPORTION MEASURE BETWEEN SECTION CORNERS—NOT SET COUNTY ALUM CAP FOR WITNESS SEC 3 SEC 2 CORNER SEC 3 S 89°38'36" W 2642.58' S 89°38'36" W 2642.58' SEC 9 \$ SEC 10


RECORD OF SURVEY FOR

EDWARD TOMANENG

SECTION 3, TOWNSHIP 4 SOUTH, RANGE 8 WEST UINTAH SPECIAL BASE AND MERIDIAN

PROPERTY DESCRIPTION BY SURVEY

All of Section 3, Township 4 South, Range 8 West of the Uintah Special Base and Meridian LESS THE N½ OF THE N½ OF THE NE¼ OF THE NE¼ of said Section. Containing 629.422 acres.

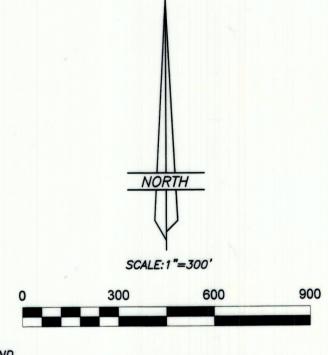

FOUND SECTION CORNERS AS NOTED ON PLAT

- FOUND OR REESTABLISHED QUARTER CORNERS AS NOTED ON PLAT
- ▲ FOUND "T" POST USED TO DETERMINE PROPERTY LINES
- FOUND REBAR SET BY OTHERS
- FOUND BEARING TREES USED TO RELOCATE CORNER
- 5/8"X24" REBAR WITH CAP STAMPED ALLRED SURVEYING SET BY THIS SURVEY

* * * EXISTING FENCES ----- CHRISTENSEN LINES

THIS SURVEY WAS PERFORMED AT THE REQUEST OF ED TOMANENG FOR THE PURPOSE OF DETERMINING THE LOCATION OF THE PROPERTY CORNERS OF THE SHOWN PARCEL. THE MONUMENTS MARKING THE PUPLIC LAND SURVEY SYSTEM WERE FOUND OR REESTABLISHED AS INDICATED ON THE PLAT AND USED TO CONTROL THE SURVEY.

BASIS OF BEARINGS

THIS SURVEY WAS PERFORMED USING GLOBAL POSITIONING SYSTEM (G.P.S.) EQUIPMENT AND PROCEDURES USING THE UTAH G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER. THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT THE SECTION CORNER COMMON TO SECTIONS 15, 16, 21, AND 22, T2S, R1W, U.S.B.&M. LOCATED AT LAT: 40°08'48.66219" N & LONG: 110°44'01.97379" W USING SAID CONTROL NETWORK.

SURVEYOR'S CERTIFICATE

I, Jerry D. Allred, do hereby certify that I am a Professional Land Surveyor, and that I hold certificate no. 148951 as prescribed by the laws of the State of Utah: I further certify that this plat and its computations were prepared from the field notes and electronic data collector files of an actual survey made by me, or under my personal supervision, of the parcels of land shown hereon, and that the monuments indicated were found or set during said survey, and that this plat accurately represents said survey to the best of my knowledge.

JERRY D. ALLRED, PROFESSIONAL LAND SURVEYOR CERTIFICATE NO. 148951 (UTAH)

A BASE STATION

COUNTY SURVEYOR FILE NO. 3919

JERRY D. ALLRED & ASSOCIATES, INC. SURVEYING CONSULTANTS 1235 NORTH 700 EAST--P.O. BOX 975

18-100-100 3 OF 3 26 DEC 2018

DUCHESNE, UTAH 84021 (435) 738-5352